

BLACKSTONE 9U Wall Mount Double Section Hinged BSCD Network Cabinet Lock

BSCD CABINET



The BLACKSTONE BSCD Series of cabinets is designed to house EIA standard 19" equipment in offices, network closets, retail locations and classrooms. This series is the best solution for IT professionals who require a secure solution and have a need to do frequent maintenance to their equipment.

This 600mm depth cabinet with 9U, 12U, 15U, 18U of rack space by BLACKSTONE is part of the BSCD and can be wall-mounted or self standing. It has removable, locking side panels for easy access, a rear swing frame allowing easy access to equipment and cabling, and (2) built-in fans to keep your equipment cool. Made of high-quality SPCC Cold Rolled Steel.

Made of high-quality SPCC Cold Rolled Steel.

FEATURES

- Exquisite design with precise dimension and craftsmanship.
- International popular smoky-gray glass front door.
- Easily be mounted on wall, or placed on floor after installed castor or feet.
- Loading capacity: 60KG.
- Top and bottom wiring channel could be closed.
- Removable front door and side panel, easily installing and maintaining
- Surface finish: Degreased, acid cleaned, phosphoric, water cleaned, electro-static powder coating, meet ROHS standard.
- Optional color: black/gray

STANDARD

comply with ANSI/EIA RS-310-D, DIN41491; PART1, IEC297-2, DIN41494; PART7, GB/T3047.2-92.


MATERIALS

Cool rolled steel
Thickness: Vertical rail: 1.5mm
Else in 1.2mm

APPLICATION


Widely used in network system, educational system, broadcasting system and telecommunication system. Suitable for placing server computer and precision electronic equipments.

BSCD CABINET

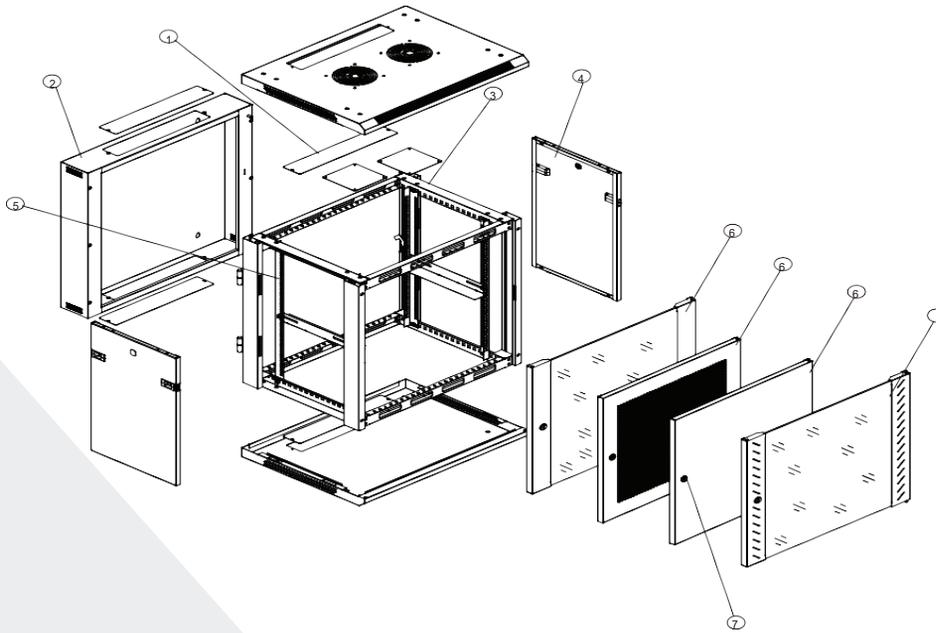

- 1. Mounting plate
- 2. Back door
- 3. Frame
- 4. Side door
- 5. Mounting rail
- 6. Front door
- 7. lock

DIMENSION (MM)

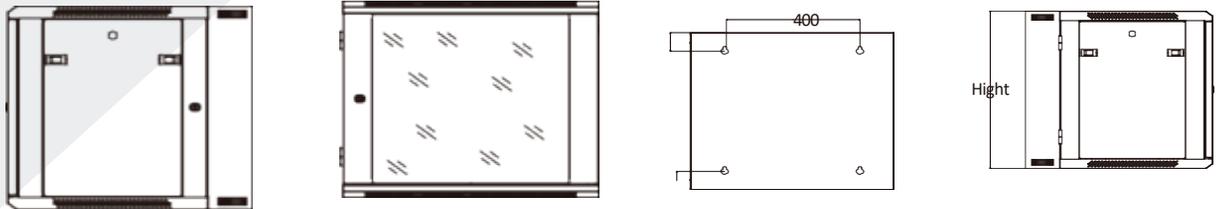


Left


Front

Side


Back

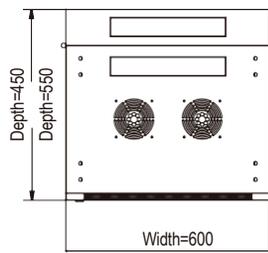

Top




Front(without glass)

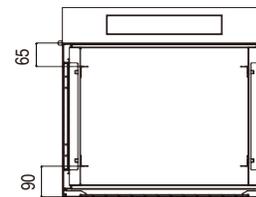

A-A Section

9.5X9.5



Mounting dimension

BLACK STONE BSCD CABINET


STANDARD ACCESSORIES

S/N	Specification	Qty	Unit	Material	surface finish	Remark
1	Frame	4	Pcs	1.2mm cold rolled steel	Powder coated	---
2	Front door	1	Pcs	1.2mm cold rolled steel	Powder coated	B type door
3	Side door	2	Pcs	1.2mm cold rolled steel	Powder coated	With lock
4	Back door	1	Pcs	---	Powder coated	---
5	Lock	1	Pcs	1.5mm cold rolled steel	---	---
6	Mounting rail	4	Pcs	1.2mm cold rolled steel	Powder coated	---
7	Mounting plate	1	Pcs	1.2mm cold rolled steel	Powder coated	---
8	Cable inlet cap	2	Pcs	---	Powder coated	---
9	Screws &nuts	10	sets	---	---	---
10	wrench	1	Pcs	---	---	---


ORDER INFORMATION

Part No.	Capacity/U	Width/mm	Depth/mm	Hight/mm	Carton Measurement			Volume/CBM	
					Width/m	Depth/m	Hight/m		
BSCD06-655	BSCD06-655-P	6U	600	550	368	0.67	0.62	0.43	0.18
BSCD09-655	BSCD09-655-P	9U	600	550	501	0.67	0.62	0.56	0.23
BSCD12-655	BSCD12-655-P	12U	600	550	635	0.67	0.62	0.70	0.29
BSCD15-655	BSCD15-655-P	15U	600	550	789	0.67	0.62	0.83	0.34
BSCD18-655	BSCD18-655-P	18U	600	550	901	0.67	0.62	0.96	0.40


DOORS




A=Steel Casement Door



B=Smoky-grey glass door



C=Smoky-grey glass door with frame punched



D=Perforation steel door with high ventilation level(hexagonal type)

RAMARKS

COLOR