



Vline Single Rack Wall-Mount Cabinet

OWNER'S MANUAL

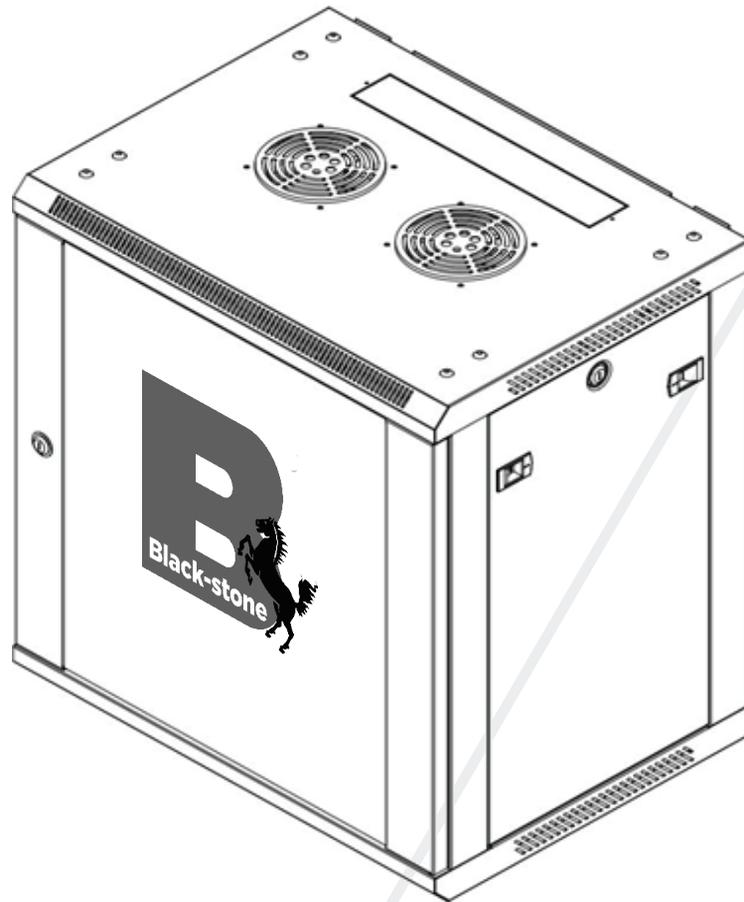


Part Number		Capacity (U)	Width (mm)	Depth (mm)	Height (mm)
VLINE-6-645	VLINE-6-645-P	6	600	450	370
VLINE-6-66	VLINE-6-66-P	6	600	600	370
VLINE-9-645	VLINE-9-645-P	9	600	450	503
VLINE-9-66	VLINE-9-66-P	9	600	600	503
VLINE-12-645	VLINE-12-645-P	12	600	450	636
VLINE-12-66	VLINE-12-66-P	12	600	600	636
VLINE-15-645	VLINE-15-645-P	15	600	450	770
VLINE-15-66	VLINE-15-66-P	15	600	600	770
VLINE-18-645	VLINE-18-645-P	18	600	450	903
VLINE-18-66	VLINE-18-66-P	18	600	600	903

1. Parts Identification

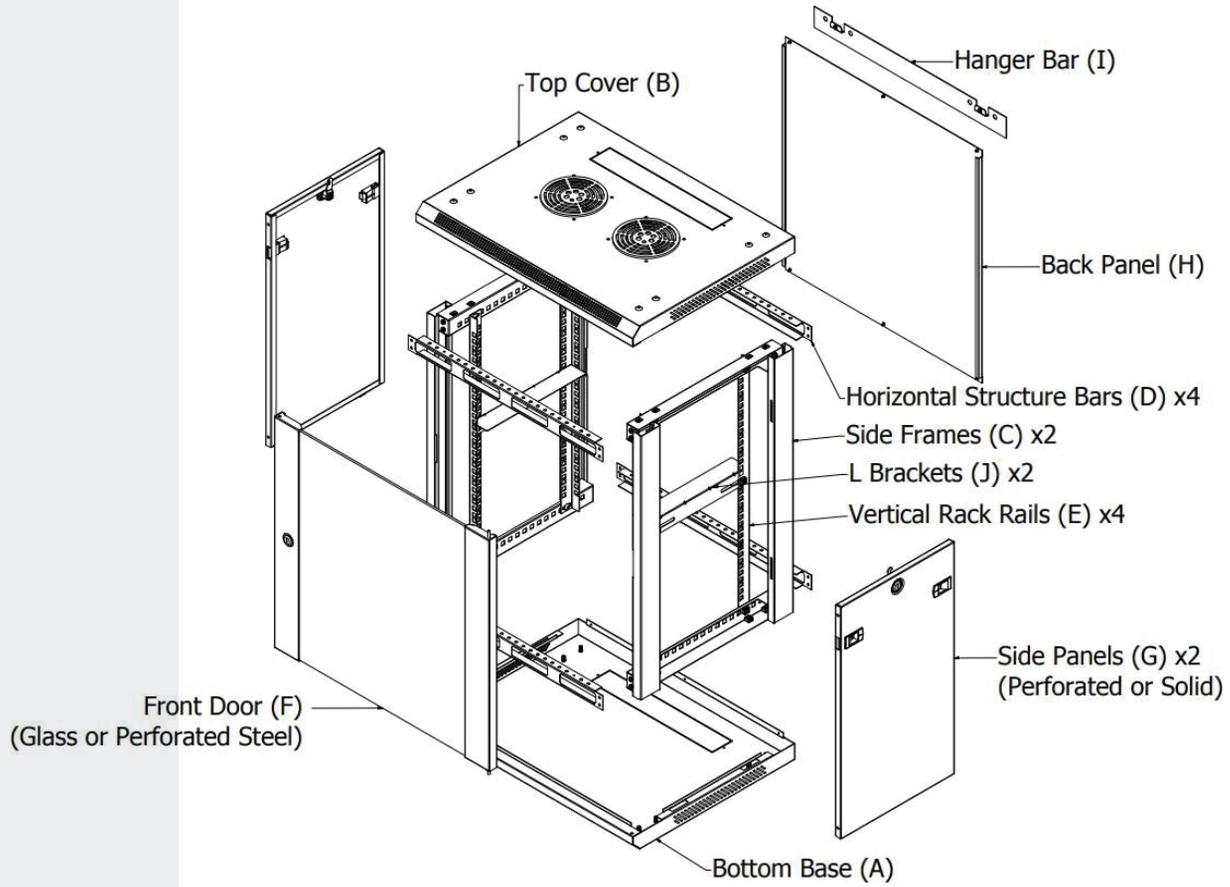

M6 Hex Head Screws
(Black)

6U,9U,12U (28x)
15U,18U (32x)



M5 Screws
(Silver)

(18x)




M3.5 Screws
(Black)

(10x)




M6 Mounting Screws
(Silver)


(10x)




M6 Cage Nuts
(Silver)
(10x)



Side Panel Latches (4x)



Side Panel Locks (2x)




Front Door Lock (1)



Hex Wrench (1)


2. Cabinet Assembly

STEP 1. Attach the 4 Horizontal Structure Bars (D) to the Side Frames (C) using 16 silver M5 Screws (L).


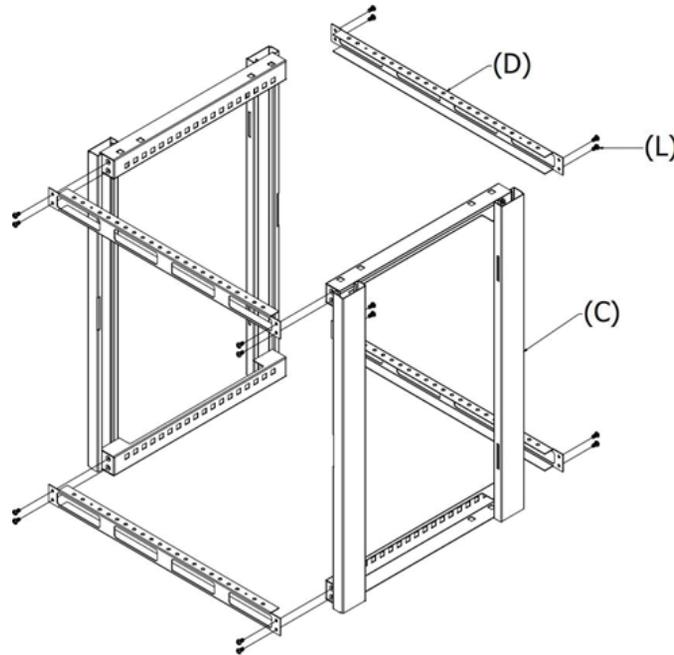


STEP 2. Insert the Cabinet Frame built in previous step into the Bottom Base (A). Secure with 8 black M6 Hex Head Screws (K) using the Hex Wrench(S).

STEP 3. Place the Top Cover (B) onto the Cabinet Frame built in STEP 1. Secure with 8 black M6 Hex Head Screws (K) using the Hex Wrench(S).

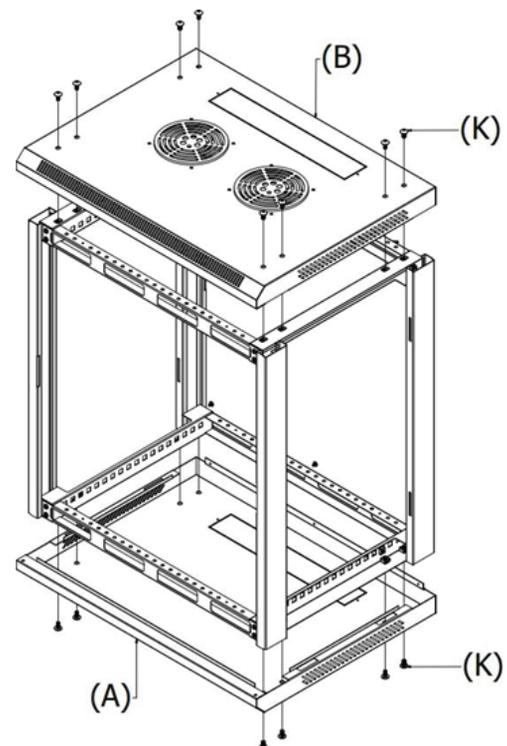

STEP 4. Install the 4 Vertical Rack Rails (E) into place at the desired depth using 2 black M6 Screws (K) and 2 silver M6 Cage Nuts (O) for each Rack Rail (E). When determining the appropriate depth, be sure to consider the equipment that you plan to mount inside the enclosure.

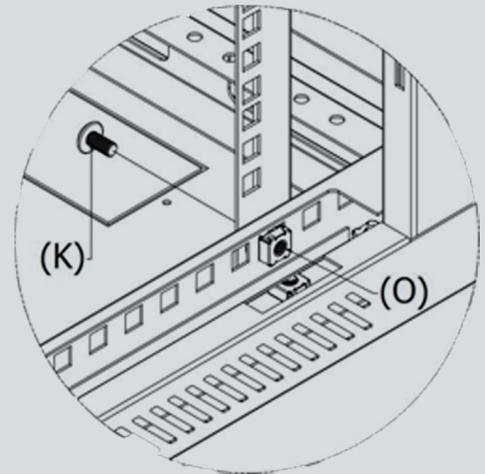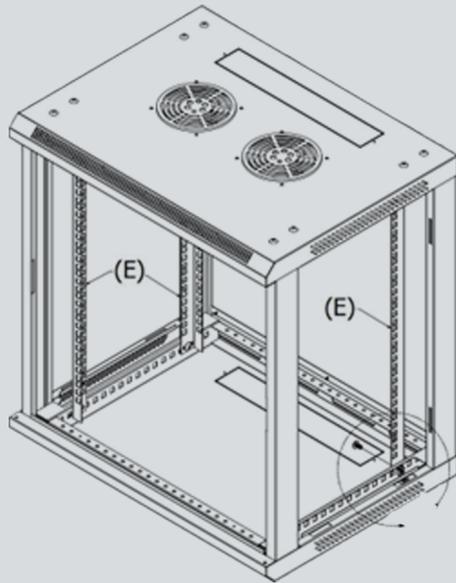


Detail A


Note: Be sure that the rail depth is the same on both sides of the cabinet.

Optional: Mount L Brackets (J) or other shelving accessories at desired height, using 2 black M6 Hex Head Screws (K) and 2 silver M6 Cage Nuts (O) for each Rack Rail (E).

(Note: To mount the L Brackets (J), the depth between front and back vertical rails should be 11" (280mm) for 450mm depth cabinet and 16.9" (430mm) for

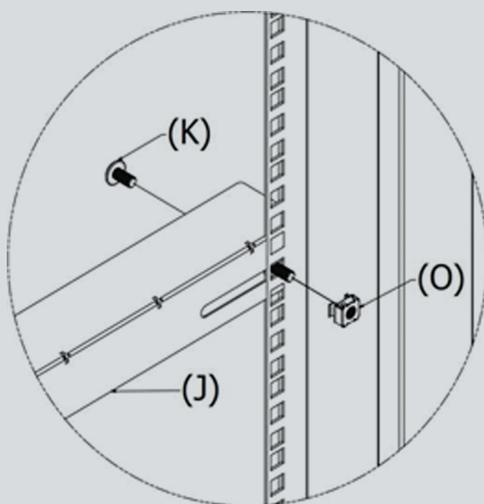


Detail B

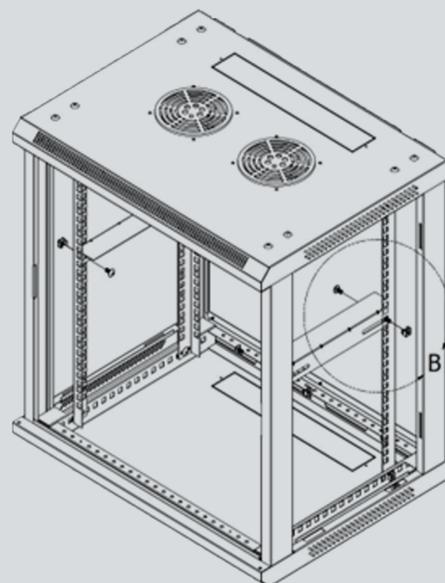


Keep this information for further reference.
Thank you for purchasing an InfraStone product.

Please examine the product for any damaged parts. If any part is damaged or missing, contact infrastone for assistance. Do not attempt to install or use product if it has been damaged. This product contains small items that could be a choking hazard – keep these items away from children.

During installation, lay product contents on cardboard or other protective surface to avoid any damage.

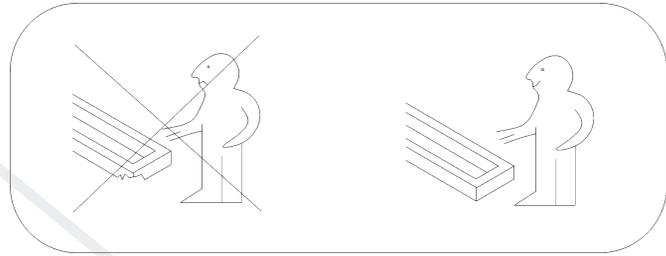

Do not use with equipment that is heavier than the indicated weight capacity for this product. This product is designed to be installed indoors on wood stud walls, solid concrete walls or brick walls. Make sure that the supporting surface will safely support the weight of the equipment and all attached hardware and components. It is recommended that installation be performed by a qualified installer. infrastone not be held responsible for damage to equipment or personal injury resulting from improper use or installation of product.

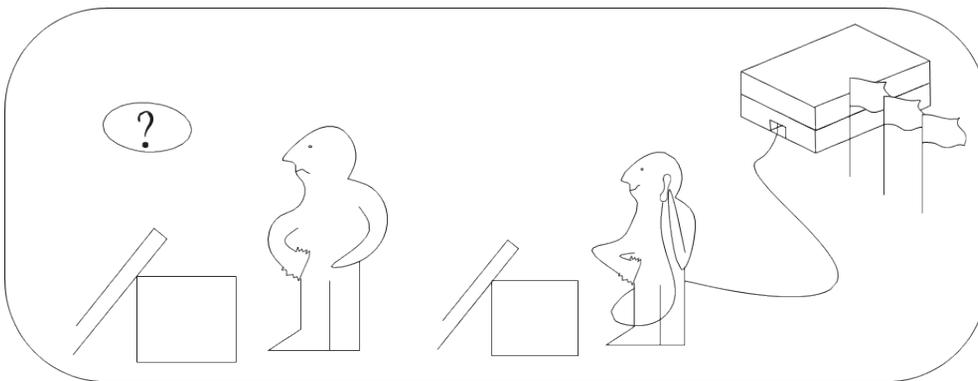

Maintenance: Check that the product is secure and safe to use at regular intervals (at least every three months).

Limitations of Liability: In no event will infrastone , LLC. be liable for any damages, whether direct or indirect, special, punitive, incidental or consequential damages (including, but not limited to, lost profits or revenue , loss of use , lost business opportunities or loss of good will) or for the costs of procuring substitute products, arising out of or in connection with the use of the product , whether such liability arises from any claim based upon contract, warranty, tort(including negligence), product liability or otherwise, whether or not seller has been advised of the possibility of such loss or damage. In no event will seller’s total cumulative liability, from all causes of action and all theories of liability, exceed the total amounts actually paid to seller by customer under the order that gives rise to any liability hereunder.